


*** T1PW 1L26 (01) *** (2100 1121) 00-06-26


Coordinates			
Mark	X	Y	R
GM	0	0	—
f 28	3590	7049	1500
DH1	-7900	-3000	—
DH2	8234	-1900	—
a 1	-7569	-3828	300
a 2	-7252	-4215	200
a 3	-5914	-5092	200
a 4	-5433	-5228	300
a 5	-3437	-6383	400
a 6	2156	-6922	400
a 7	4625	-5757	300
a 8	5106	-5621	200
a 9	6444	-4745	200
a 10	6761	-4358	300

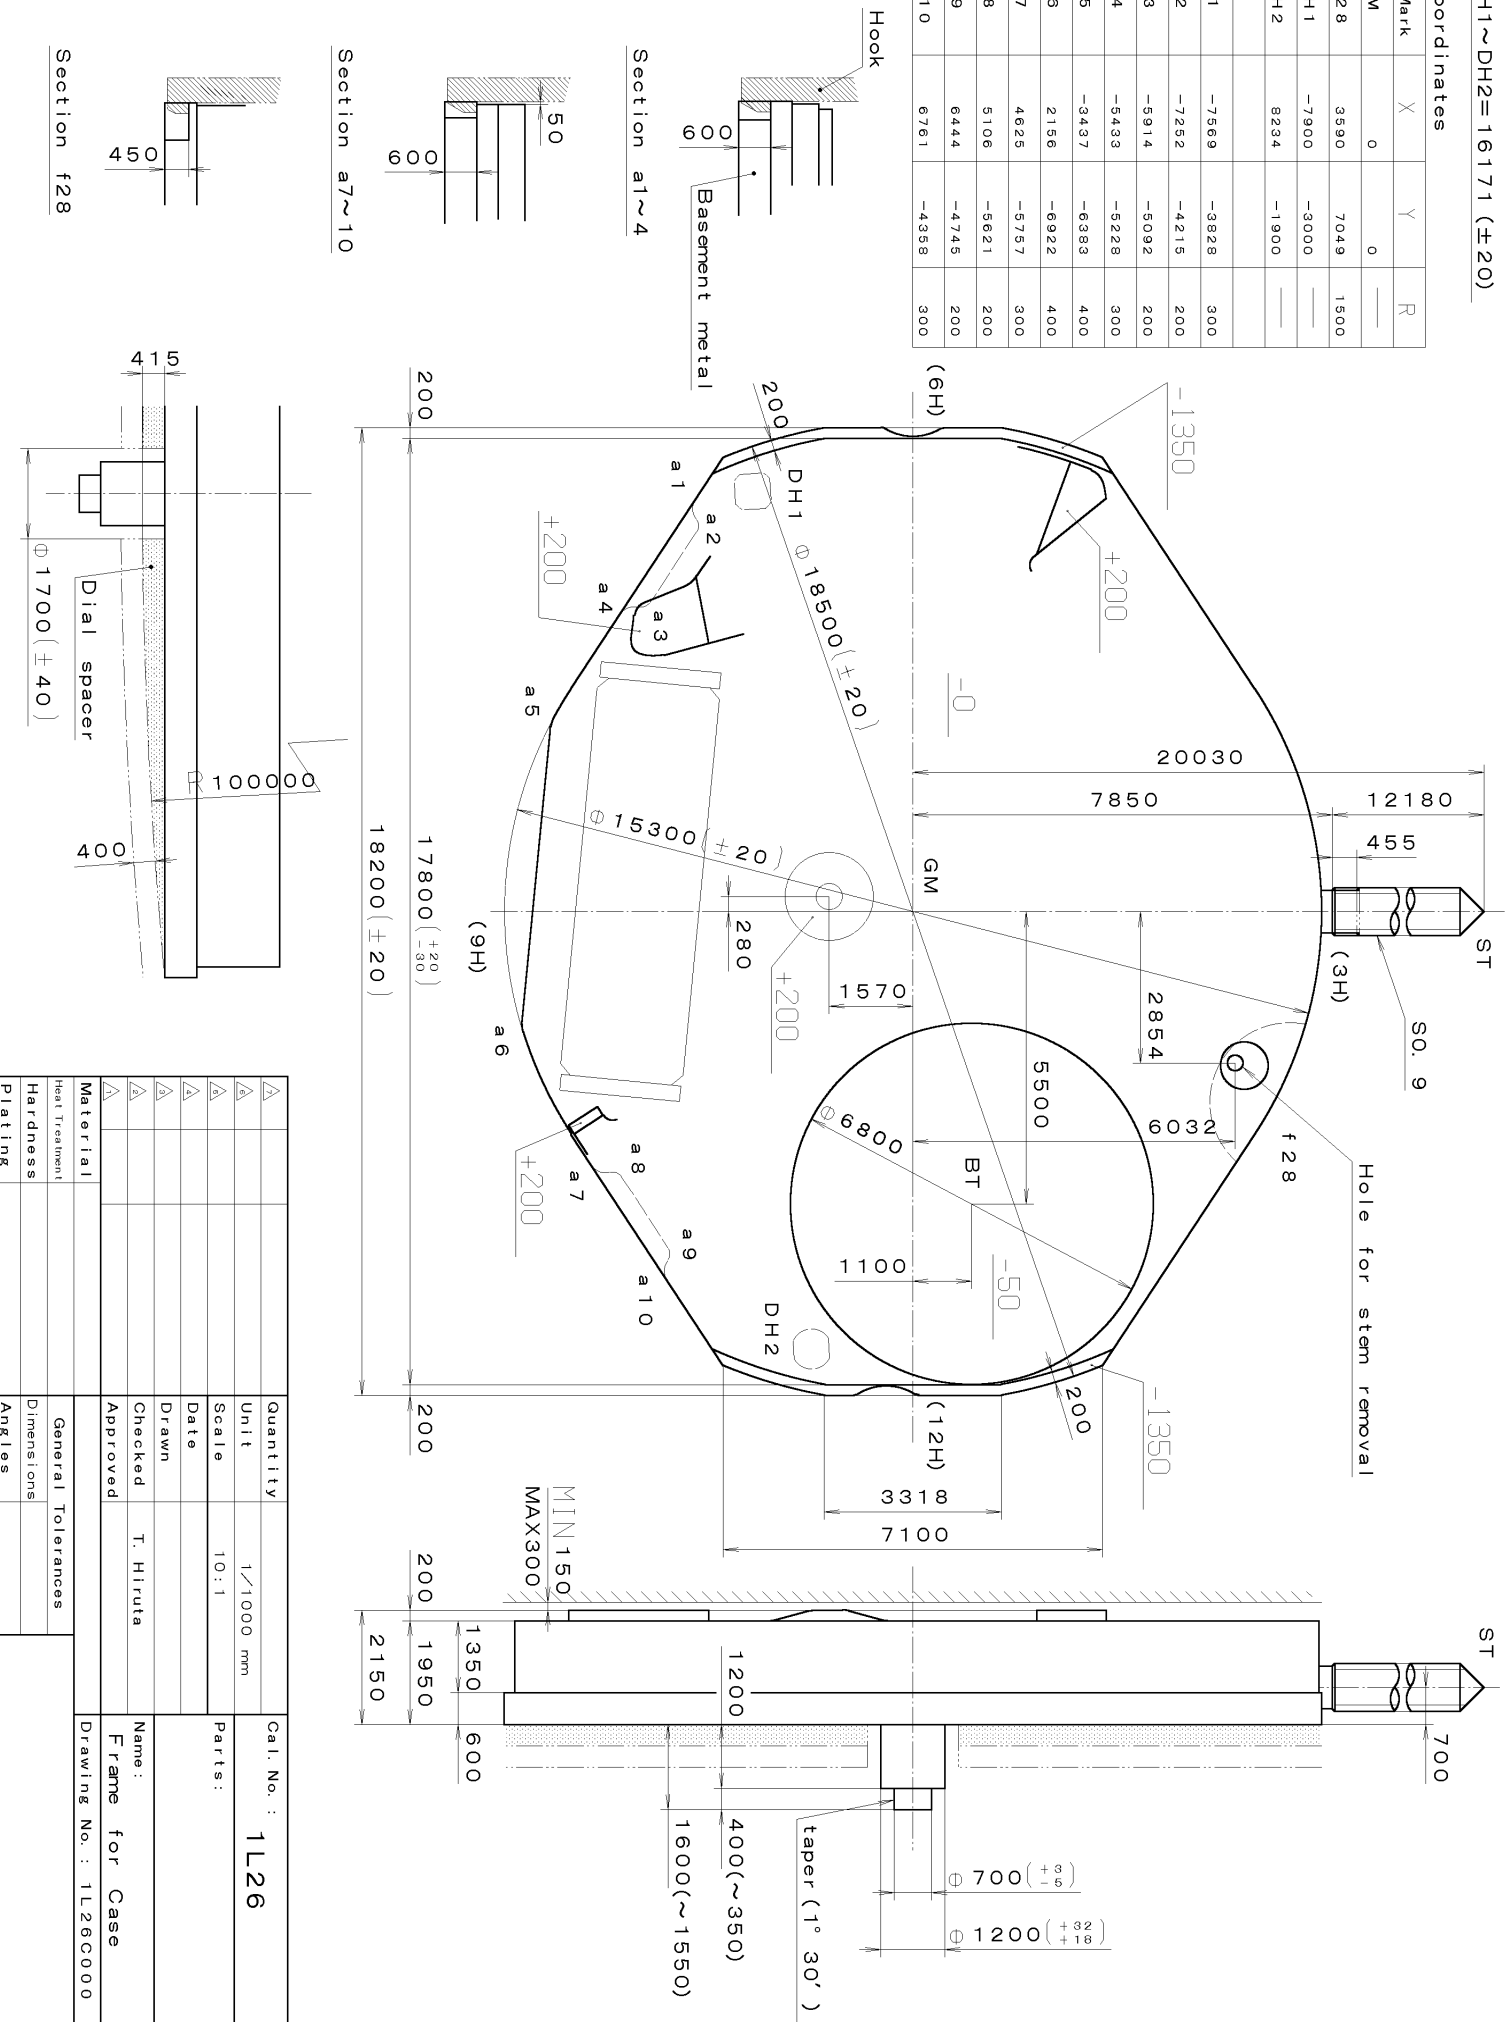

Quantity		Cal. No. : 1L26	
Quantity	1/1000 mm	Quantity	1/1000 mm
Unit	10:1	Unit	10:1
Scale		Scale	
Date		Date	
Drawn		Drawn	
Checked	T. Hiruta	Checked	T. Hiruta
Approved		Approved	
Material		Name: Frame for Case	
Heat Treatment		Drawing No.: 1L26C0000	
Hardness			
Plating			
General Tolerances			
Dimensions			
Angles			


This drawing is provisional and subject to our reconfirmation and/or revision without notice.

*** T I P W (01) *** (2100 1121) 00-06-16

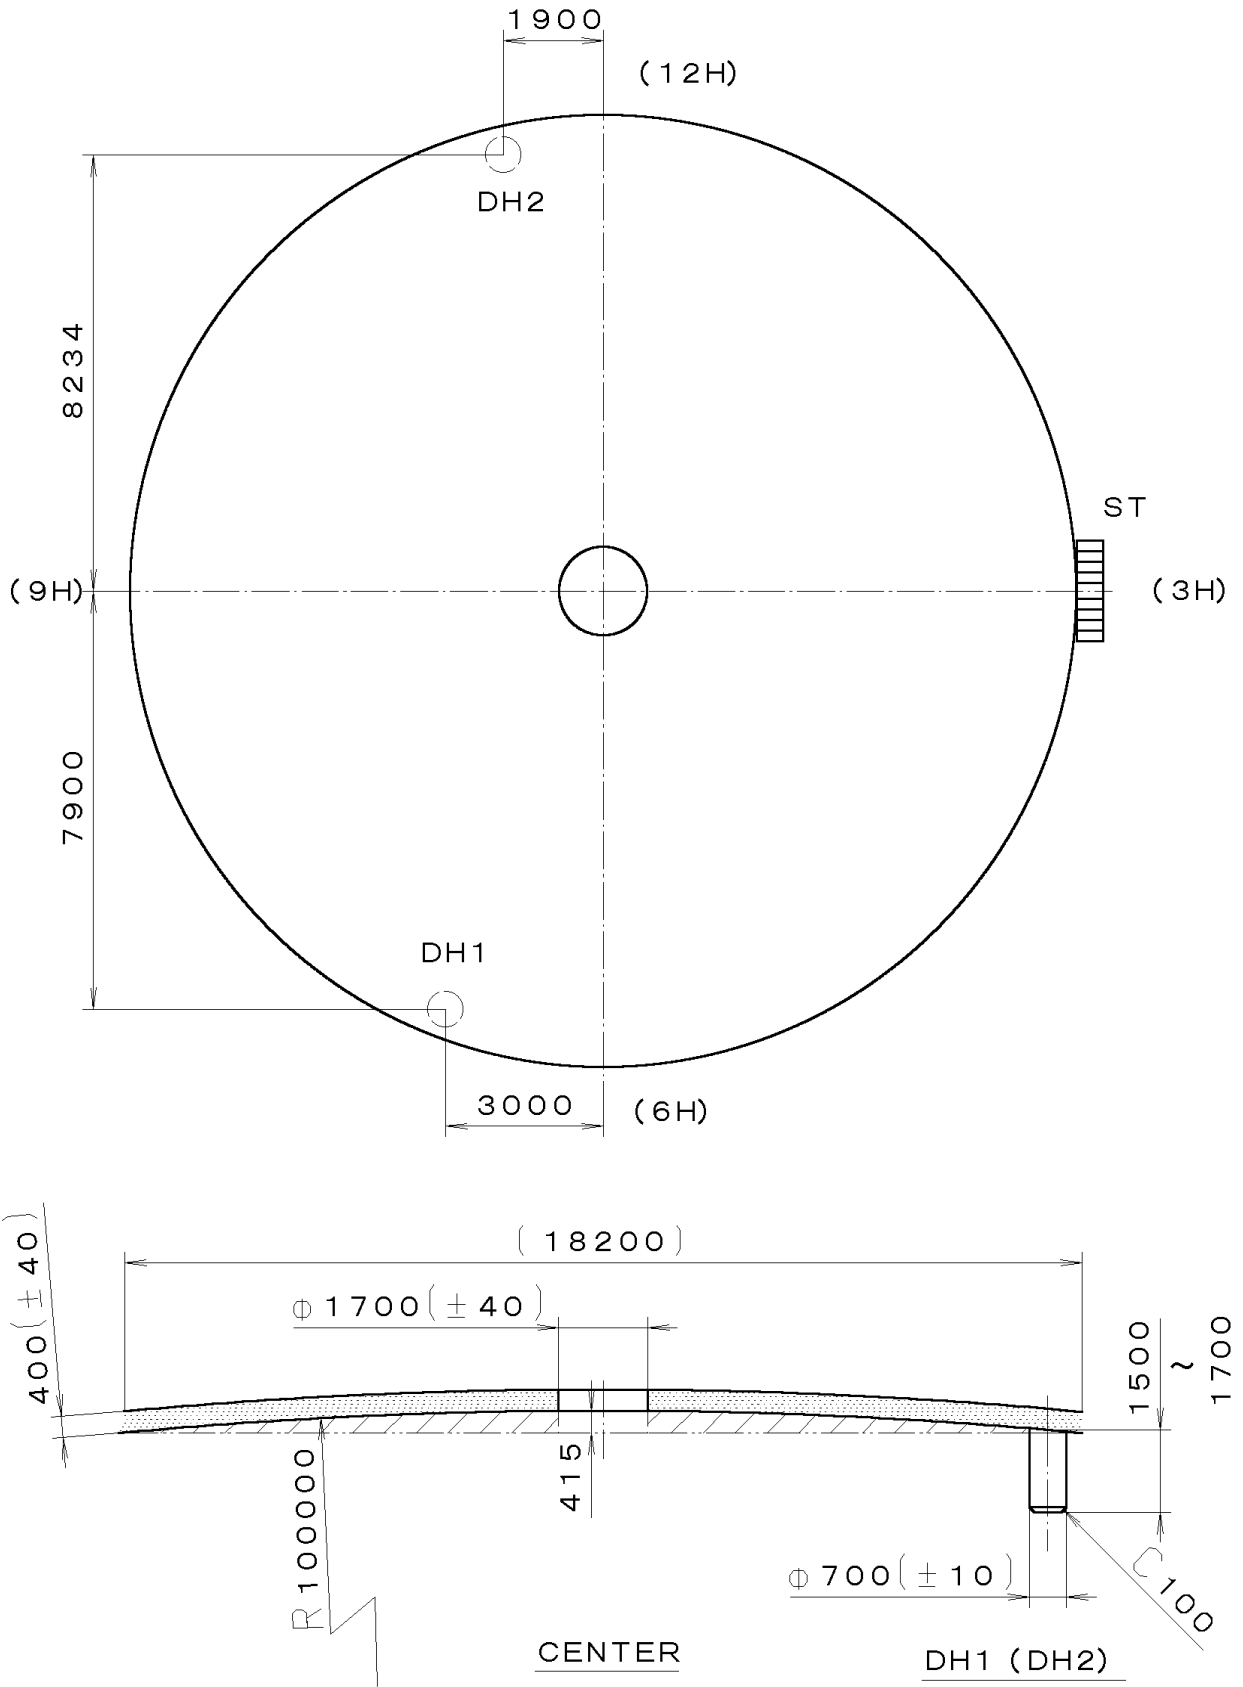

7		Quantity		Cal. No. :	1L26-10A
6		Unit	1/1000 mm	Parts:	
5		Scale	7:1	Name:	Indications for Dial
4		Date		Drawing No. : 1L26D000	
3		Drawn			
2		Checked	T. Hiruta		
1		Approved			
Material					
Heat Treatment		General Tolerances			
Hardness		Dimensions			
Plating		Angles			

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

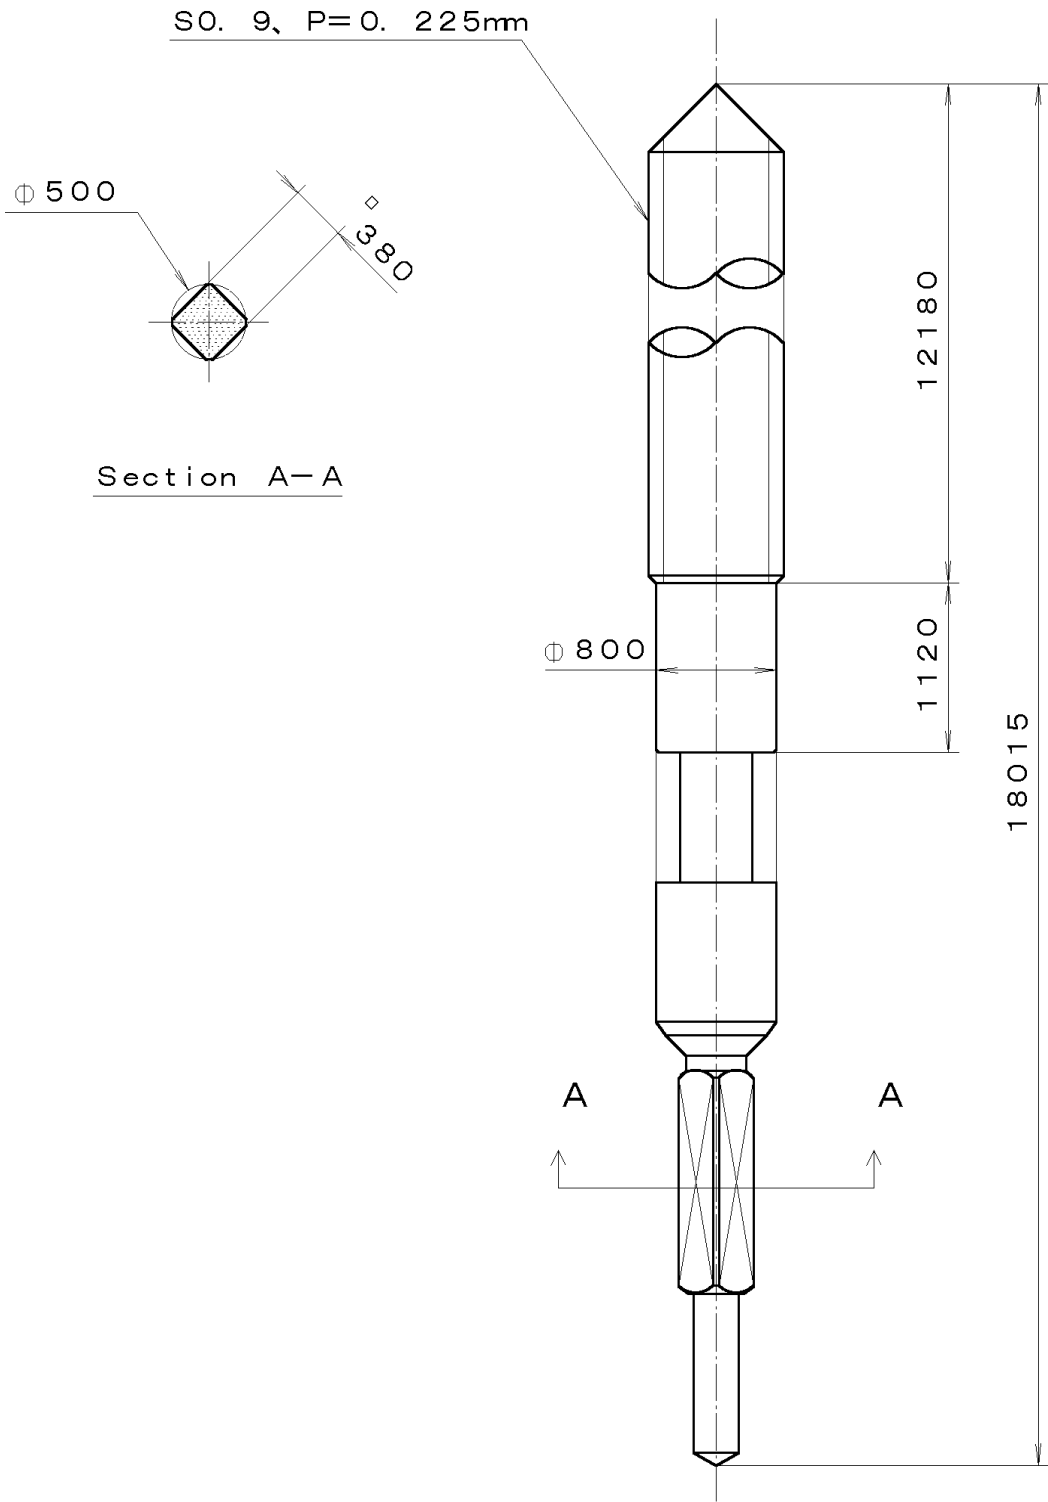

065-477 (01) *** (2100 1121 A-01 A-01) 00-06-22

7			Quantity		Cal. No. :
6			Unit	1/1000 mm	Parts:
5			Scale	20:1	
4			Date		065-477
3			Drawn		
2			Checked	T. Hiruta	Name:
1			Approved		SETTING STEM
Material					Drawing No. : 4770S000
Heat Treatment			General Tolerances		
Hardness			Dimensions		
Plating			Angles		